

NORDAC *ON* (SK 300P series)

Compact – Focused – Powerful



NORD DRIVESYSTEMS

NORDAC ON


Features

- ▶ Plug-&-Play for fast commissioning
 - ▶ Full plug-in capability
 - ▶ Standardized VFD
- ▶ Future security
 - ▶ IIoT-capability
 - ▶ Firmware update via Ethernet
 - ▶ Integrated PLC
- ▶ Variant reduction
 - ▶ Drives usable over a wide speed range
 - ▶ Integrated Industrial Ethernet Interfaces switchable via parameters
- ▶ Optimized construction
 - ▶ Very compact design
 - ▶ Space-saving through integration of Ethernet communication
- ▶ Encoder interface for NORDAC ON+
- ▶ Optional functional safety: STO from size 2
- ▶ Optional internal braking resistors from size 2
- ▶ Diagnostic interface for parameterization units or NORDAC ACCESS BT
- ▶ Integrated brake control from size 2
- ▶ Integrated temperature monitor (TF)

NORDAC ON SK 30xP

Industry: Warehouse

Power: 0.50 – 3.50 hp
 Input voltage: 3 ~ 460 V
 Supply voltage: 24 V DC external
 Overload capacity: 150% for 60 s, 200% for 5 s, 250% for 1 s
 Ambient temperature: -30...+40° C (S1)
 Protection class: IP55/IP66

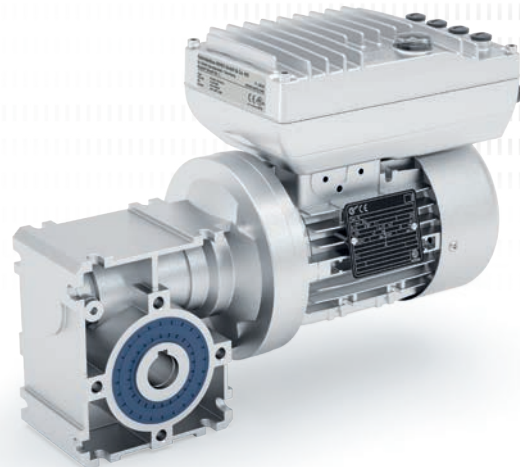

Motor	Size 1	Size 2	Size 3
63 LP/4 – 2600 r/min	10.6 lb-in – 0.50 hp	10.6 lb-in – 0.50 hp*	
71 SP/4 – 2600 r/min	14.2 lb-in – 0.60 hp	14.2 lb-in – 0.60 hp*	
71 LP/4 – 2600 r/min		21.2 lb-in – 1.00 hp	
80 SP/4 – 2600 r/min		31.9 lb-in – 1.27 hp	
80 LP/4 – 2600 r/min			43.4 lb-in – 1.75 hp
90 SP/4 – 2600 r/min			62.8 lb-in – 2.50 hp
90 LP/4 – 2600 r/min			86.7 lb-in – 3.50 hp

* These VFD - motor combinations are possible when functions such as brake control or SK CUG-STO / internal braking resistor are required.

NORDAC ON+ SK 31xP

Industry: Intralogistics

Power: 0.50 – 4.00 hp

Input voltage: 3 – 460 V

Supply voltage: 24 V DC external


Overload capacity: 150% for 60 s, 200% for 5 s

Ambient temperature: -30...+40° C (S1)

Protection class: IP55/IP66

Wall Mounting

- ▶ Can be used for NORDAC ON and NORDAC ON+
- ▶ Range of functions similar to the motor-mounted VFD

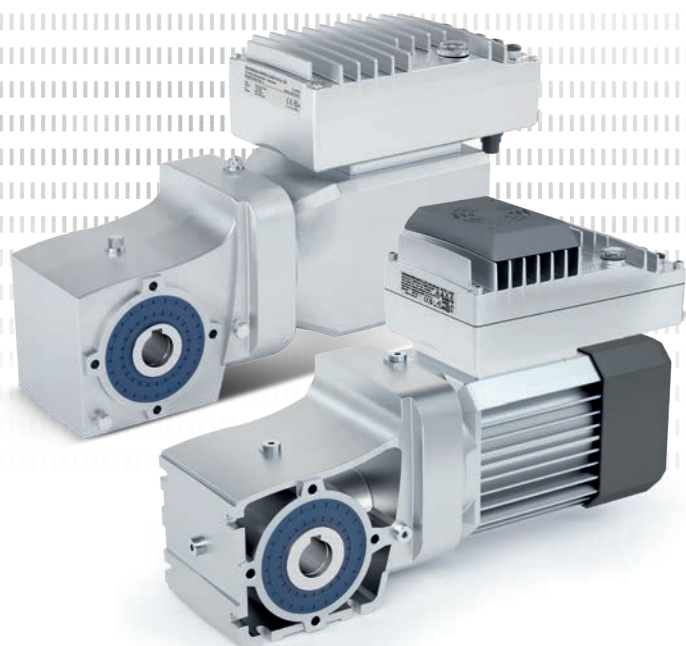

Motor (non-ventilated)	Size 2	Size 3
IE5+ SK 71 N1/8 – 2100 r/min	14.2 lb-in – 0.50 hp	
IE5+ SK 71 N2/8 – 2100 r/min	28.3 lb-in – 1.00 hp	
IE5+ SK 90 N1/8 – 2100 r/min		44.3 lb-in – 1.50 hp
IE5+ SK 90 N2/8 – 2100 r/min		60.2 lb-in – 2.00 hp


Motor (ventilated)	Size 2	Size 3
IE5+ SK 71 F1/8 – 2400 r/min	17.7 lb-in – 0.75 hp	
IE5+ SK 71 F2/8 – 2400 r/min	33.6 lb-in – 1.27 hp	
IE5+ SK 90 F1/8 – 2400 r/min		53.1 lb-in – 2.00 hp
IE5+ SK 90 F2/8 – 2400 r/min		77.9 lb-in – 3.00 hp
IE5+ SK 90 F3/8 – 2400 r/min		105.3 lb-in – 4.00 hp



<https://www.nord.com/us/products/drive-electronics/decentralized-drive-solutions/sk-300p-nordac-on-on-variable-frequency-drive.jsp>

Ordering is Easy With myNORD Online Tools!

- ▶ Obtain drawing files direct from quote configuration
- ▶ Effortlessly select & configure customized drive solutions
- ▶ Create quotes with account-specific net pricing
- ▶ Order-specific documentation
- ▶ 24/7/365 order tracking
- ▶ Select and order spare parts

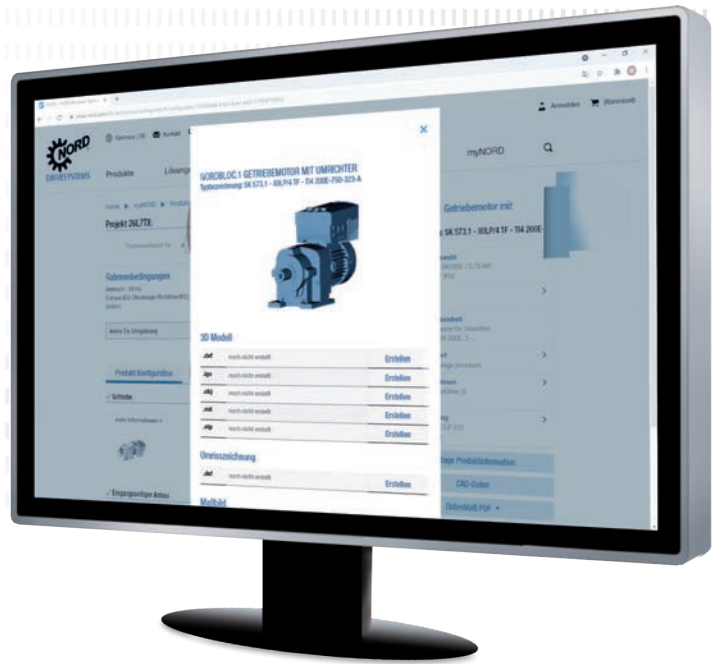

Register now at myNORD.com!



US

Central Region
Corporate Headquarters
800 NORD Drive
Waunakee, WI 53597
Tel. 888.314.6673
info.us@nord.com
www.nord.com

East Region
300E Forsyth Hall Dr.
Charlotte, NC 28273
Tel. 888.314.6673
info.us@nord.com

West Region
1180 Railroad St.
Corona, CA 92882
Tel. 888.314.6673
info.us@nord.com

South Region
350 Cypress Hill Dr, Suite 400
McKinney, TX 75071
Tel. 888.314.6673
info.us@nord.com

CA

NORD Gear Limited
Brampton, ON
41 West Drive
Brampton, ON L6T4A1
Tel. 800.668.4378
info.ca@nord.com

MX

NORD DRIVE SYSTEMS SA DE CV
Queretaro, Mexico
Av. Industria Textil B.6
Parque Industrial PYME, Huimilpan
QRO - Mexico 76950
Tel. 52 442 688 7110
info.mx@nord.com